



MT60 | 2mm Aluminium Diminishing Strip


MT60 is designed for use where 2mm vinyl tiles or sheetgoods meet concrete slab floors.

MT60 is specified to withstand heavy traffic situations that may be encountered, for example – heavy, hard-wheeled stock carts or trolleys, as well as shopping trolleys

MT60 is designed to be used in conjunction with 2mm vinyl tiles and sheetgoods, reducing down to 0.65mm. It is assumed that sub-floors have been prepared according to the relevant Australian/New Zealand Standards (ie. AS/NZ 1884 – 2012).

Product Specifications

Product Code:.....MT60
Aluminium:.....6063/T6 Hardness
Overall Length:3.66m
Horizontal Width:30mm
Vertical Height:2mm
Finish:Natural Mill
Processing:.....N/A
Pieces Per Carton:.....10 Lengths

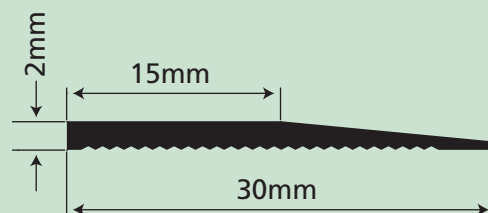

Installation Instructions

1. Recommended fastening methods are bonded (using “MAXBOND SLS Fast Set Gripper and Metal Mouldings Adhesive”, or similar) or Drill and Plug using 9g x 32mm philips head screw.
2. Firmly retain the diminishing strip against the installed tiles to ensure no gapping. Mark out in a straight line, and drill a 6mm hole through the trim, into the slab to a depth of not greater than 35mm, and secure, using a plug and countersunk screw. Repeat this process down the length of the finish.
3. A bead of mastic adhesive or silicone can be applied beneath the diminishing strip to ensure that sub-floor irregularities are isolated.

MJS STOCKISTS