



## MT61 | 3mm Aluminium Diminishing Strip


MT61 is designed for use where 3mm commercial vinyl tiles or sheetgoods meet concrete slab floors.

MT61 is specified to withstand heavy traffic situations that may be encountered, for example – heavy, hard-wheeled, stock carts or trolleys, as well as shopping trolleys.

MT61 is designed to be used in conjunction with 3mm vinyl composite tiles, reducing down to 0.65mm. It is assumed that sub-floors have been prepared according to the relevant Australian/New Zealand Standards (ie. AS/NZ 1884 – 2012).

### Product Specifications

Product Code:.....MT61  
Aluminium:.....6063/T6 Hardness  
Overall Length: .....3.66m  
Horizontal Width: .....30mm  
Vertical Height: .....3mm  
Finish: .....Natural Mill  
Processing:.....N/A  
Pieces Per Carton:.....10 Lengths

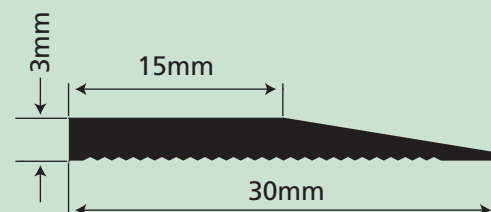

### Installation Instructions

1. Recommended fastening methods are bonded (using “MAXBOND SLS Fast Set Gripper and Metal Mouldings Adhesive”, or similar, or Drill and Plug using 9g x 32mm Philips head screw.
2. Firmly retain the diminishing strip against the installed tiles to ensure no gapping. Mark out in a straight line, and drill a 6mm hole through the trim, into the slab to a depth of not greater than 35mm, and secure using a plug and countersunk screw. Repeat this process down the length of the finish.
3. A bead of mastic adhesive or silicone can be applied beneath the diminishing strip to ensure that sub-floor irregularities are isolated.

### MJS STOCKISTS