



MX08 | Dual 25mm Non-Slip Carborundum Nosing


MX08 is designed for use on stairs internally, or externally where a non-slip insert is required for safety reasons.

MX08 is suitable for medium to heavy duty pedestrian traffic areas that require W/R11 ratings under AS/NZS 4586-2013.

Product Specifications

Product Code:..... MX08
Aluminium:..... 6063/T5 Hardness
Overall Length:3.66m
Horizontal Width:82mm
Vertical Height:32mm
Finish: Matte Natural Anodised
Processing:..... Drilled and Countersunk
Pieces Per Carton:..... 10 Lengths

MX08 is deemed to satisfy the requirements and recommendations of The Building Code of Australia, and applicable Australian Standards.

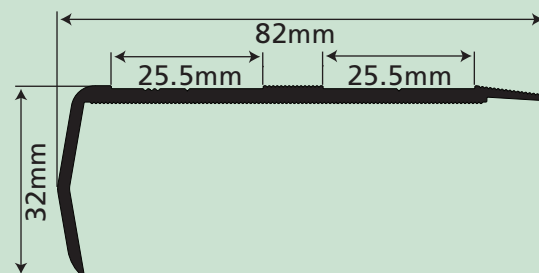

Installation Instructions

May be secured in place by drilling and counter-sinking the screw heads in a drill and plug installation. When this method is used, it is recommended that a bead of silicone or mastic adhesive is run along both bottom length edges of the extrusion to fill in any surface variations of the concrete floor. This will remove any subsequent "tapping" effect that could develop.

Recommended to be used with HT25B (25mm) Black/HT25SY (25mm) Safety Yellow carborundum inserts (sold separately).

The HT25B/HT25SY carborundum inserts are supplied in ready to use form, with a high grab pressure sensitive adhesive pre-applied to the backing.

Ensure the two indented areas are free from dirt or other contaminants before applying inserts, simply peel back a section of the release paper and carefully fit the insert tape into the recessed area, maintaining an approximate 300mm peel back working length.

When the inserts have been completely fitted we recommend using a small roller along the entire insert length to ensure firm adherence.

MJS STOCKISTS