





MX48 | Control Joint Cover – Ramped

MX48 is designed to be fitted over existing vinyl flooring after a relocated building has been re-assembled.

Product Specifications

Product Code:..... MX48
Aluminium:..... 6063/T6 Hardness
Overall Length:..... 3.66m
Horizontal Width:..... 86mm
Vertical Height:..... 3.5mm
Finish:..... Matte, Natural Anodised
Processing:..... Drilled and Countersunk
Pieces Per Carton:..... 10 Lengths

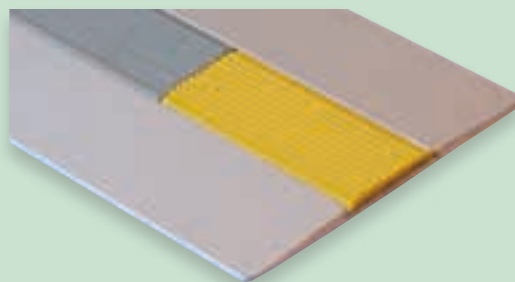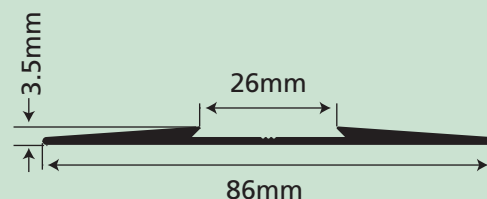

Installation Instructions

Fixed by screwing down on either side of the re-assembled floor, covering the existing vinyl flooring surface, thereby providing reinforcement to the re-joined floor. (Use of MX49 2mm Edged Control Joint is recommended should you need to butt up to vinyl tiles or sheetgoods.)

Recommended to be used with HT26 (26mm) Black/Grey/Safety Yellow TPE inserts (sold separately).

To ensure the TPE insert is correctly adhered to the aluminium nosing, we recommend the use of MJS Max Bond 102 Super Contact Adhesive.

Best results are obtained by ensuring both bonding surfaces are clean, then applying an even coat of adhesive to both surfaces by brush or roller. Allow solvent to evaporate and adhesive to become tacky and dry to touch. Time to tack up is 10-15 minutes at 20°C, open time is approximately 45 minutes.

Ensure the insert is correctly positioned before bringing it into contact with the nosing, as no adjustment is possible once the surfaces have met. Complete by using a hand roller, pressing enough to bring both surfaces into contact.

Note: Where the control joint cover is used over a wooden, non-tactile surface, it is recommended that a bead of silicone or mastic adhesive is applied to the underside to eliminate “tapping” that may occur due to uneven sub-floor surfaces.

MJS STOCKISTS