





MX53 | Aluminium Bull Nose Stair

MX53 is designed for use in internal installations, over wooden steps to increase the level of safety by providing a sure footing when ascending or descending steps. The abrupt 4mm end is designed to be installed up to existing vinyl commercial flooring.

MX53 is specified to withstand the heaviest of traffic situations that may be encountered, for example – school steps, steps at commercial or public venues and facilities. Not suitable for curved or otherwise contoured stairs.

Product Specifications

Product Code:..... MX53
Aluminium:..... 6063/T6 Hardness
Overall Length:3.66m
Horizontal Width: 61.36mm
Vertical Height:25mm
Finish: Matte Natural Anodised
Processing:..... Drilled and Countersunk
Pieces Per Carton:..... 10 Lengths

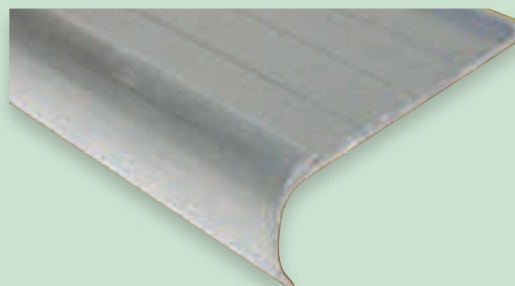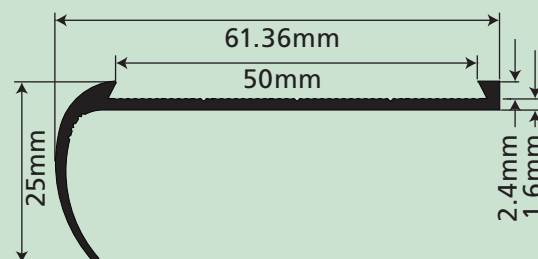

Installation Instructions

Can be secured in place by drilling and counter-sinking the screw heads in a drill and plug installation.

To ensure the TPE stair insert is correctly adhered to the aluminium nosing, we recommend the use of MJS Max Bond 102 Super Contact Adhesive.

Recommended to be used with HT50 (50mm) Black/Grey/Safety Yellow TPE inserts (sold separately).

Best results are obtained by ensuring both bonding surfaces are clean, then applying an even coat of adhesive to both surfaces by brush or roller. Allow solvent to evaporate and adhesive to become tacky and dry to touch. Time to tack up is 10-15 minutes at 20°C, open time is approximately 45 minutes.

Ensure the insert is correctly positioned before bringing it into contact with the nosing, as no adjustment is possible once the surfaces have met. Complete by using a hand roller, pressing enough to bring both surfaces into contact.

© 2013 ACN 100 338 896. All Rights Reserved.

August 2015

NOTE: While MJS Floorcoverings make every effort to ensure the accuracy of the information shown herein, it is the user's responsibility to satisfy themselves of the suitability of the product for their specific application.

MJS STOCKISTS