





## MX57 | Aluminium Deluxe Square Nosing

MX57 is designed for use in internal installations, over wooden or concrete steps to increase the level of safety by providing a sure footing when ascending or descending steps. The ramped finish is designed to be installed over existing vinyl flooring.

MX57 has been specified to withstand the heaviest of traffic situations that may be encountered, for example – school steps, steps at commercial or public venues and facilities. Not suitable for curved or otherwise contoured stairs.

### Product Specifications

Product Code:..... MX57  
Aluminium:..... 6063/T6 Hardness  
Overall Length: .....3.66m  
Horizontal Width: .....66.2mm  
Vertical Height: .....30mm  
Finish: ..... Matte Natural Anodised  
Processing:..... Drilled and Countersunk  
Pieces Per Carton:..... 10 Lengths

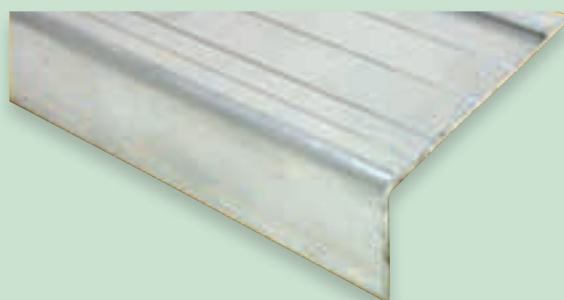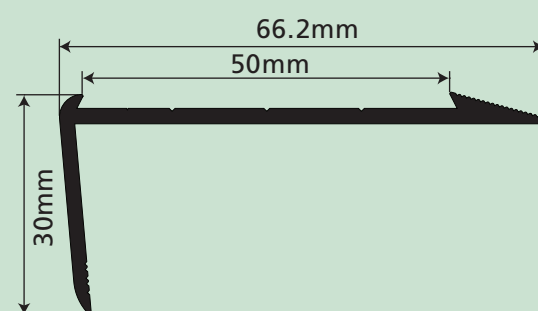

### Installation Instructions

Can be secured in place by drilling and counter-sinking the screw heads in a drill and plug installation.

To ensure the TPE stair insert is correctly adhered to the aluminium nosing, we recommend the use of MJS Max Bond 102 Super Contact Adhesive.

Recommended to be used with HT50 (50mm) Black/Grey/Safety Yellow TPE inserts (sold separately).

Best results are obtained by ensuring both bonding surfaces are clean, then applying an even coat of adhesive to both surfaces by brush or roller. Allow solvent to evaporate and adhesive to become tacky and dry to touch. Time to tack up is 10-15 minutes at 20°C, open time is approximately 45 minutes.

Ensure the insert is correctly positioned before bringing it into contact with the nosing, as no adjustment is possible once the surfaces have met. Complete by using a hand roller, pressing enough to bring both surfaces into contact.

### MJS STOCKISTS