



## MX58 | Aluminium Over Carpet Nosing



MX58 is designed for use in internal installation, over concrete or wooden steps that have previously been carpeted, or where the step edges of the carpet have been excessively worn.

MX58 increases the level of safety by providing a sure footing when ascending or descending steps.

MX58 is specified to withstand heavy traffic situations that may be encountered. It is not recommended or suitable for curved or otherwise contoured stairs.

### Product Specifications

Product Code:..... MX58  
Aluminium:..... 6063/T6 Hardness  
Overall Length:..... 3.66m  
Horizontal Width:..... 70mm  
Vertical Height:..... 36mm  
Finish:..... Matte Natural Anodised  
Processing:..... Drilled and Countersunk  
Pieces Per Carton:..... 10 Lengths

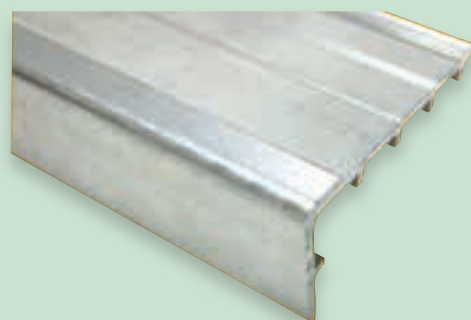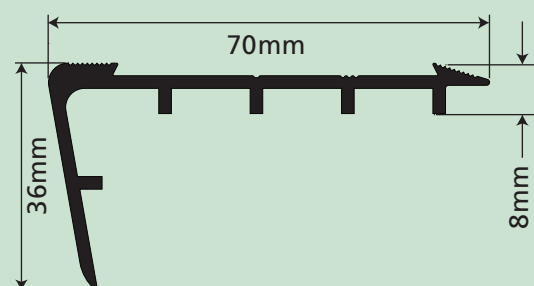

### Installation Instructions

Can be secured in place by drilling and counter-sinking the screw heads in a drill and plug installation.

To ensure the TPE stair insert is correctly adhered to the aluminium nosing, we recommend the use of MJS Max Bond 102 Super Contact Adhesive.

Recommended to be used with HT50 (50mm) Black/Grey/Safety Yellow TPE inserts (sold separately).

Best results are obtained by ensuring both bonding surfaces are clean, then applying an even coat of adhesive to both surfaces by brush or roller. Allow solvent to evaporate and adhesive to become tacky and dry to touch. Time to tack up is 10-15 minutes at 20°C, open time is approximately 45 minutes.

Ensure the insert is correctly positioned before bringing it into contact with the nosing, as no adjustment is possible once the surfaces have met. Complete by using a hand roller, pressing enough to bring both surfaces into contact.

### MJS STOCKISTS