

MXFCTN | Flexible TPE Carpet Tile Nosing

MXFCTN is designed for use where modular carpet tiles are installed on stairs, landings or tiers.


MXFCTN is specified to withstand heavy traffic situations that may be encountered, such as in lecture theatres, auditoriums, etc.

MXFCTN can be curved to follow the contour of modestly radiused installations through the gentle application of hot air, softening the profile sufficiently to follow the required contour.

Product Specifications

- Product Code:..... MXFCTN
- Overall Length:3.66m
- Horizontal Width:63mm
- Vertical Height:35mm
- Finish:..... Black
- Processing:..... N/A
- Pieces Per Carton:..... 10 Lengths

Thermoplastic elastomers (TPE) are replacing thermoset rubber, polyvinyl chloride (PVC) due to their inherent properties. TPE's are neurotoxins- and carcinogens-free and do not contain polynuclear aromatics (PNA), nitrosamine and 2-MBT leachable materials.

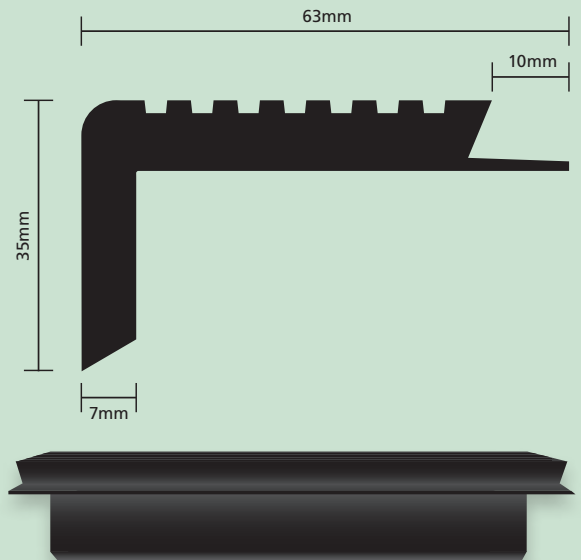

Installation Instructions

Prepare surface in accordance with AS/NZ 1884 – 2012 – Floorcoverings – Resilient Sheet and Tiles – Laying and Maintenance Practices.

For linear installations, an adhesive such as Max Bond 102 Super Contact Adhesive, or Max Bond SLS Fast Set Gripper and Metal Moulding Adhesive (avoiding traffic until cured – approximately 6 hours) are recommended. Note: It is recommended that the backside of the nosing be wiped with a rag dipped in white spirits before adhering, ensuring any residue dries off before adhering.

Where the nosing is to be contoured, an appropriate contact adhesive such as Max Bond 102 Super Contact Adhesive is recommended.

In all cases, please follow adhesive manufacturer's usage and application recommendations.

MJS STOCKISTS