



Armstrong installation and maintenance products have been specially developed for vinyl floors.

The complete Armstrong system includes:

- **Adhesives**
- **Tools & Equipment**
- **Floor Care Products**
- **Complete Range of Vinyl Extrusions**

PRODUCT DESCRIPTION

Water based acrylic adhesive for indoor applications.

USAGE

For installation of

- Luxury vinyl tile
- Luxury vinyl plank
- Vinyl wall sheet

BONDS TO

Clean, dry, smooth and hard:

- Concrete
- Masonite underlay
- Plywood underlay
- Fibre Cement underlay

SPECIAL PROPERTIES

- Low VOC. Independently tested to Green Building Council IEQ-13 Solvent Free
- Easy to spread
- Fast grab with very strong ultimate bond
- Excellent plasticiser migration resistance
- Suitable for use over under-floor-heating
- Excellent dimensional stability
- Anti-fungal and anti-microbial properties

NON-STAIN GUARANTEE

We guarantee that Armstrong installation products will not stain your Armstrong floor.

LVT-100

Luxury Vinyl Tile
and Plank Adhesive

Low Voc

Solvent free

Versatile

Suitable for vinyl plank, tile and wall sheet

Fast grab

Low slippage for fast reliable installation



ARM-2009
GECA 01-2007
Adhesives




www.armstrong-aust.com.au

DIRECTIONS


- Subfloor preparation and installation must conform to Australian Standards
- Subfloor must be structurally sound, dimensionally stable, clean, dry and dust free.
- Contaminants such as paints, crayons, grease, curing agents and bond breakers should be removed mechanically by grinding or shot blasting.
- Acclimatise material to job conditions at between 15°C and 30°C for 24 hours prior to installation, maintain these temperatures during and after installation.
- Stir well before using. Any liquid on the surface should be stirred into the adhesive.
- Keep container tightly covered when not using.
- Spread adhesive evenly and uniformly with the recommended trowel.
- Allow adequate open time (varies with temperature and humidity) to prevent air bubbles over non-porous subfloors.
- Lay floor into wet adhesive and peel back to ensure sufficient adhesive transfer and re-lay. Adjust floor coverings within 10-15 minutes.
- Roll floor in both directions with a 45Kg roller
- Avoid traffic for 12 hours after installation.
- Remove wet adhesive from floor and tools with soapy water. Use mineral turps for dried adhesive, care should be taken to ensure no damage occurs to the surrounding surfaces (test in an inconspicuous area)

RECOMMENDED TROWELS / COVERAGE

Armstrong S-891 Fine Notch Steel Trowel

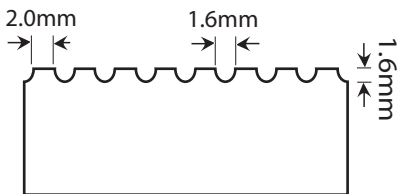

Porous surfaces. Coverage approx 4.5 – 5m²/l

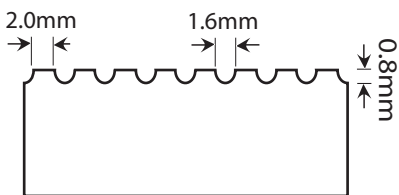

Non porous surfaces. Coverage approx 7 - 8m²/l

STORAGE/HANDLING

- Keep from freezing
- Shelf life is one year from date of manufacture if unopened
- Dispose of responsibly

NOTE: Do not reuse container. Dispose of container and adhesive residue in accordance with Federal, State and Local bodies waste disposal regulations. Do not flush adhesive down drains.

Armstrong SV200 contains anti-fungal and anti-microbial agents for both in-can stability and cured adhesive film. Therefore, the cured adhesive will not harbour fungi or bacteria after installation, (proper hygiene and cleaning regimes of the flooring must also be followed).

WARNING

SAFETY PRECAUTIONS

Avoid eye and skin contact. If eye contact occurs, flush with water for 15 minutes and call physician. Do not take internally. If swallowed, do not induce vomiting, call physician immediately. After use wash skin thoroughly with soap and water.

During the installation process, adequate ventilation of the work area should be maintained, without causing the entry of contaminants to other parts of building. Persons who are sensitive to odours and/or chemicals should avoid the work area.

EXISTING RESILIENT FLOORING

WARNING Do not sand, dry sweep, dry scrape, drill, saw, bead blast, or mechanically chip or pulverise existing resilient flooring, backing, lining felt or asphaltic 'cut-back' adhesives. These products may contain either asbestos fibres or crystalline silica.

Avoid creating dust. Inhalation of such dust is a cancer and respiratory tract hazard.

Smoking by individuals exposed to asbestos fibres greatly increases the risk of serious bodily harm.

Unless positively certain that the product to be removed is a non-asbestos containing material, you must presume it contains asbestos. Regulations may require that the material be tested to determine asbestos content.

The warnings and guidance contained in these instructions in relation to the potential for asbestos in floor covering materials are given in good faith. However, regulations, codes and directives as to the best method of handling asbestos are under continual revision. It is the obligation of the installer to ensure that practises used are safe, without risk to health, and meet all legal requirements.

WARRANTY

IMPORTANT NOTICE TO PURCHASER – As the use of this product is beyond the manufacturer's control, liability is restricted to a replacement of any material proved faulty and the manufacturer is not responsible for any loss or damage arising from failure to follow the instructions for use.

KEEP OUT OF REACH OF CHILDREN.

Material Safety Datasheet is available upon request.

For a copy of a Material Safety Data Sheet or for Technical information please contact:

Armstrong Customer Services

Free Call: 1800 632 624 (Australia Only)

Email: customer_services@armstrong.com

ARMSTRONG WORLD INDUSTRIES (AUSTRALIA) PTY LTD

29-39 MILLS ROAD, BRAESIDE VIC 3195

Ph. 03 9586 5500 Fax. 03 9580 4810

www.armstrong-aust.com.au