

Product Data Sheet



Max Bond

M60 CARPET LATEX

DESCRIPTION

MAX BOND M60 Carpet Latex is a Natural Latex compound for sealing raw edges of carpet and installing felt underlay to substrates.

DIRECTION FOR USE

Prior to joining carpet seams with heat bond tape or seam sealer, apply MAX BOND M60 to edge of carpet and allow to dry.

Doing this helps prevent with loss of tufts and unraveling after seams have been trimmed.

When used to install felt underlay to subfloors apply a liberal amount to the subfloor and install underlay into wet latex.


CLEAN UP

Clean tools immediately after use with warm soapy water.

TYPICAL PROPERTIES.

Base:	Natural Latex
Appearance:	White Liquid
Viscosity:	Thin Liquid
Shelf Life:	12 months in sealed container at 20°C
Packaging:	1, 4 & 15 Litre
Odour:	Ammonia
Freezability:	Avoid Freezing

Note: Always carry out your own test to confirm suitability of this product with your application. Additional information on physical properties, health hazards, storage, handling and transport is available in the Material Safety Data Sheet (MSDS), available on MJS web site

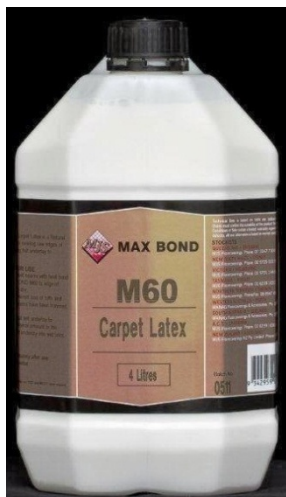

May 2011



DISTRIBUTED BY:

QUEENSLAND

Brisbane
MJS Floorcoverings
35 Dividend St
Mansfield 4122
Ph: 07 3347 7300
Fax: 1800 063 299

NSW

Sydney
MJS Floorcoverings
7 Walker Place
Wetherill Park 2164
Ph: 02 9725 5519
Fax: 02 9725 5552

VICTORIA

Melbourne
MJS Floorcoverings
82 Endeavour St
Sunshine 3020
Ph: 03 9314 2872
Fax: 03 9314 6971

TASMANIA

Hobart
MJS Floorcoverings
101 Albert Rd
Moonah 7000
Ph: 03 6228 1032
Fax: 03 6228 1035

NORTHERN TERRITORY

Darwin
MJS Floorcoverings
14, 128 Coonawarra Rd
Winnellie 0821
Ph: 08 8947 6917
Fax: 08 8947 1528

SOUTH AUSTRALIA

Adelaide
Manufacturers'
Agencies Pty Ltd
Unit 7/9 William St
Mile End South 5031
Ph: 08 8234 8933
Fax: 08 8234 8955

WESTERN AUSTRALIA

Perth
Manufacturers'
Agencies Pty Ltd
28 Carbon Court
Osborne Park 6017
Ph: 08 6240 1000
Fax: 08 9445 1332