





MT50 | Hammered Stairnosing

MT50 is designed for use in light traffic stair installations.

MT50 Hammered Stairnosing meets the slip resistance requirement under AS1428-2009 Design for Access and Mobility, and the Building Code of Australia, but does not comply with the luminance requirement of the codes due to one piece construction and anodised finish (*where used*).

Product Specifications

Product Code:.....MT50
Aluminium:..... 6063/T6
Overall Length: 3.31m
Horizontal Width: 31mm
Vertical Height:29mm
Finish:Natural Aluminium
10µm Anodised Bronze/Gold/Pewter
Processing:..... Countersink Punched
Pieces Per Carton:..... 10 Lengths

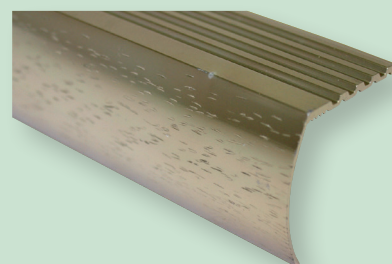

Installation Instructions

1. Measure and cut to size.
2. For wooden sub-floors, Hammered Stairnosings are recommended to be secured by means of the appropriately coloured ripplrtrim nail, sized to fit the countersink punched holes in the horizontal surface of the trim.
3. Hammer nail down until the trim is held firmly without defacing the surface.
4. On concrete sub_floors, it is recommended to drill and plug, then use appropriately coloured rippletrim nail to finish installation.

MJS STOCKISTS