



MX55 | Commercial Carpet Tile Nosing



MX55 is designed for use in internal installations, over concrete or wooden steps to increase the level of safety by providing a sure footing when ascending or descending steps.

MX55 is specifically designed to take up to a 6mm carpet tile insert.

MX55 is specified to withstand heavy traffic situations that may be encountered. It is not recommended or suitable for curved or otherwise contoured stairs.

Product Specifications

Product Code:..... MX55
 Aluminium:..... 6063/T6 Hardness
 Overall Length:3.66m
 Horizontal Width:84mm
 Vertical Height:27mm
 Finish:..... Matte Natural Anodised
 Processing:..... Drilled and Countersunk
 Pieces Per Carton:..... 10 Lengths

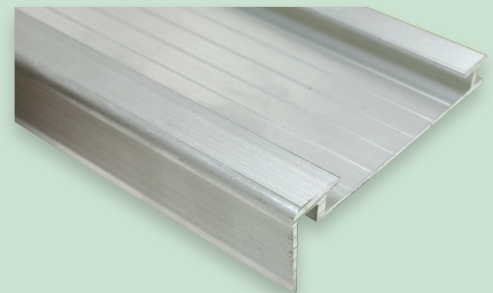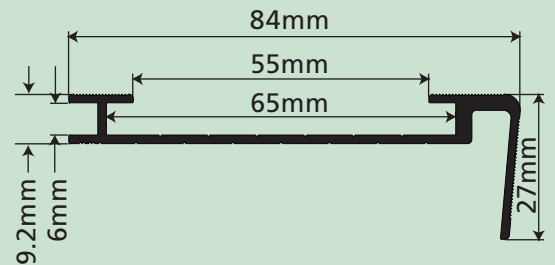

Installation Instructions

Can be secured in place by drilling and counter-sinking the screw heads in a drill and plug installation.

To ensure the carpet tile insert is correctly adhered to the aluminium nosing, we recommend the use of MJS Max Bond 102 Super Contact Adhesive.

Best results are obtained by ensuring both bonding surfaces are clean, then applying an even coat of adhesive to both surfaces by brush or roller. Allow solvent to evaporate and adhesive to become tacky and dry to touch. Time to tack up is 10-15 minutes at 20°C, open time is approximately 45 minutes.

Ensure the insert is correctly positioned before bringing it into contact with the nosing, as no adjustment is possible once the surfaces have met. Complete by using a hand roller, pressing enough to bring both surfaces into contact.

MJS STOCKISTS