



PRODUCT DATA SHEET

5.5MM CUSHION TILE / VINYL STOP


5.5mm Vinyl Stop

RBM Plastic Extrusions 5.5mm Vinyl Stop is manufactured to act as a finishing strip when finishing off the edge on a 2mm Vinyl Floor.

The 5.5mm Vinyl Stop is manufactured from a Flexible PVC material, that has been formulated to endure high traffic areas with regards to wear. It has also been formulated to be compliant with the requirements for the "Best Practise Guidelines for PVC in the Built Environment" Clauses 7.1 & 7.2.

Product Specifications

	5.5mm Vinyl Stop
Roll Size	40 mtrs
Width	45mm
Height	5.5mm
Material	Flexible PVC
Finish	Matt
Rolls per carton	1 roll

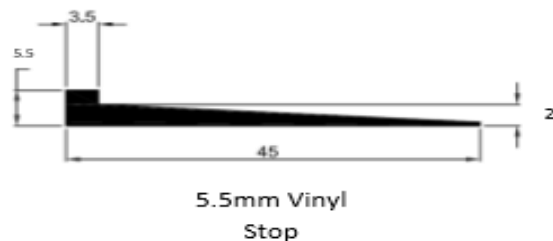

**Please note the dimensions are nominal sizes*

Installation Instructions

The floor surface where the 5.5mm Vinyl Stop is to be laid must be free of any moisture, dirt, dust, oil, cleaning agent or any other foreign matter that might be present around the area.

The adhesive that is recommended to be used with the RBM 5.5mm Vinyl Stop is the MJS Max Bond 102 Super Contact. This can be used for both Linear Installations and for contoured installations (avoid traffic until cured, approximately 6 hours).

Note: It is recommended that the back side of the 5.5mm Vinyl Stop be wiped with a rag dipped in white spirits before adhering, and ensure that all residue dries off before adhering.

In all cases please adhere to the manufacturers usage and application recommendations.

To apply adhesive

1. Apply adhesive to 5.5mm Vinyl Stop by either brushing or rolling adhesive on. Two coats are recommended.
2. Ensuring that wall and floor area is clean of foreign matter, brush or roll adhesive onto the area where the 5.5mm Vinyl Stop is to be applied
3. Allow both area to dry for 10 – 12 minutes, and then press the 5.5mm Vinyl Stop onto the area it is to be applied to
4. Use hand roller to fit profile into desired area correctly

NOTE: This information and our technical advice – whether verbal or in writing are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and use. Refer to relevant local, state, and federal construction codes and standards for requirements Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. All measurements are nominal.



QLD

35 Dividend St
Mansfield
Ph: 07 3347 7300
Fax: 07 3343 9792

NTH QLD

1 / 12 Civil Road
Garbutt
Ph: 07 4728 8644
Fax: 07 4728 2496

NSW

7 Walker Place
Wetherill Park
Ph: 02 9725 5519
Fax: 02 9725 5552

ACT

6B / 3 Barrier St
Fyshwick
Ph: 02 6239 1000
Fax: 02 6228 1430

VIC

82 Endeavour Way
Sunshine
Ph: 03 9314 2872
Fax: 03 9314 6971

TAS

101 Albert Rd
Moonah
Ph: 03 6228 1032
Fax: 03 6228 1035

SA

22 Fifth Street
Bowden
Ph: 08 8340 2266
Fax: 08 8340 2188