

Inspiring  
Great  
Spaces™

**Armstrong®**  
**FLOORING**

## NATURAL ELEMENTS® LUXURY VINYL PLANK

5.0 x 230 x 1500mm Cush 'n' Plank

5.0 x 228 x 1219mm Cush 'n' Plank

2.0 x 228 x 1219mm Luxury Vinyl Plank

2.0 x 184 x 1219mm Luxury Vinyl Plank



# NATURAL ELEMENTS® 5.0mm CUSH 'N' PLANK

There's no need to sacrifice style for function. Armstrong Flooring offers you the option of Natural Elements Cush 'n' Plank, a range of resilient vinyl flooring planks in realistic wood designs. Now featuring 14 brand new wood looks in 1500mm long, 230mm wide and 5.0mm thick planks, there are

even more stunning visuals in the Natural Elements range of Luxury Vinyl Planks. Combining underfoot comfort and timeless beauty with durability and low maintenance, these floors are the perfect choice for any home.



Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

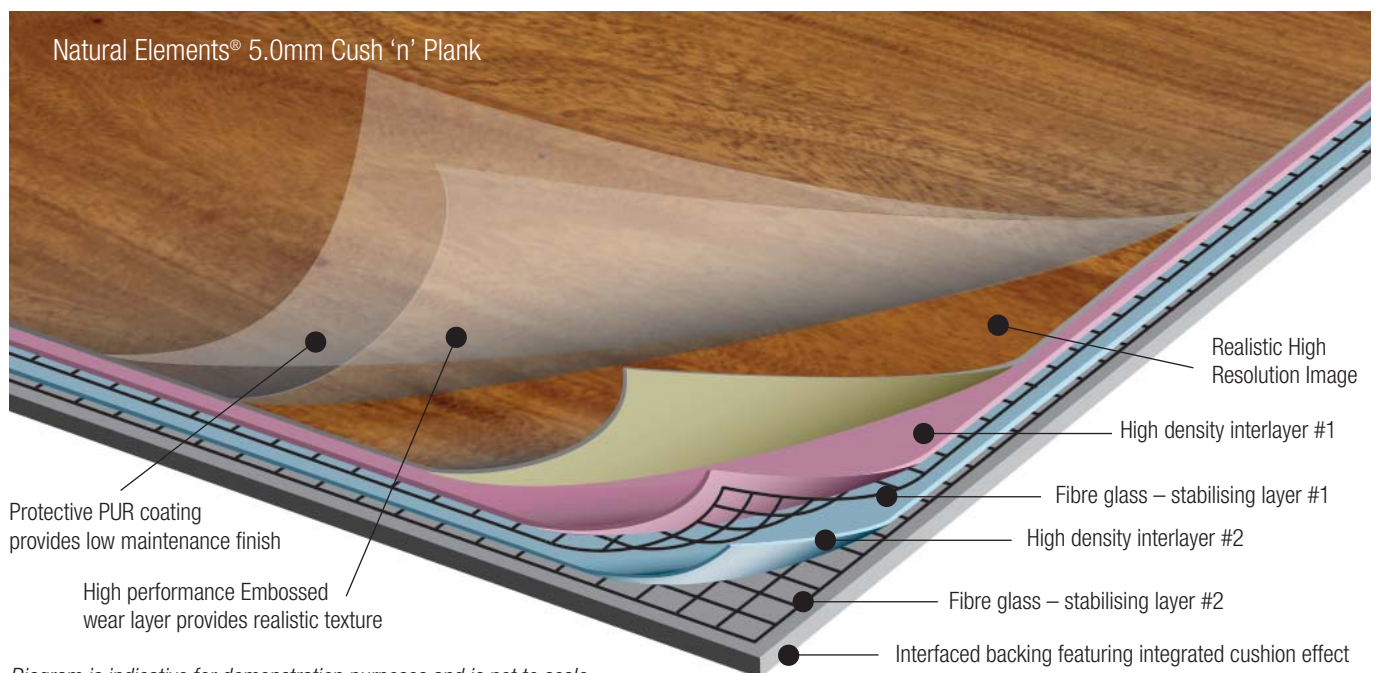


Diagram is indicative for demonstration purposes and is not to scale.



# NATURAL ELEMENTS® 5.0mm CUSH 'N' PLANK

Available in 5.0 x 230 x 1500mm Planks



FRENCH OAK – MINERAL  
Surface Embossing: EC-C



FRENCH OAK – STORM  
Surface Embossing: EC-C



FRENCH OAK – BURNT UMBER  
Surface Embossing: EC-C



HAMPTON – SAND  
Surface Embossing: EC-C



HAMPTON – DRIFTWOOD  
Surface Embossing: EC-C



HAMPTON – SHALE GREY  
Surface Embossing: EC-C

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



# NATURAL ELEMENTS® 5.0mm CUSH 'N' PLANK

Available in 5.0 x 230 x 1500mm Planks



WINSTON – TEA CHEST  
Surface Embossing: EC-C



WINSTON – CARBON  
Surface Embossing: EC-C



BOSTON – MOCHA  
Surface Embossing: EC-C



BOSTON – OYSTER  
Surface Embossing: EC-C



NAPA – OLIVE  
Surface Embossing: EC-C



NAPA – MEADOWOOD  
Surface Embossing: EC-C

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



# NATURAL ELEMENTS® 5.0mm CUSH 'N' PLANK

Available in 5.0 x 230 x 1500mm Planks



WOODLAND TRUST – RUSTIC COAL  
Surface Embossing: EC-C



WOODLAND TRUST – RUSTIC PEARL  
Surface Embossing: EC-C

**Note:** Woodland Trust in both Rustic Coal and Rustic Pearl have the added features of a variance of grain species, as well as colour variations in the visual to give that true "woodland appearance". The manufacturer recommends mixing of planks from several cartons to ensure that visual is achieved prior to the final installation process.



Woodland Trust – Rustic Pearl



# NATURAL ELEMENTS® 5.0mm CUSH 'N' PLANK

Available in 5.0 x 228 x 1219mm Planks



FOSSIL CREEK – CP/EMBER  
Surface Embossing: EC-C



FOSSIL CREEK – CP/SAND  
Surface Embossing: EC-C



CP/BARNYARD GREY  
Surface Embossing: EC-F



HABITAT – CP/TIMBERWOLF  
Surface Embossing: EC-R

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



Barnyard Grey



# NATURAL ELEMENTS® 5.0mm CUSH 'N' PLANK

Available in 5.0 x 228 x 1219mm Planks



ANTIQUE OAK – CP/SHADOW  
Surface Embossing: EC-C



ANTIQUE OAK – CP/TUMBLEWEED  
Surface Embossing: EC-C



CP/PROVINCIAL BROWN  
Surface Embossing: EC-F



CP/BONDI  
Surface Embossing: EC-F



HOMESTEAD – CP/RANCH  
Surface Embossing: EC-F



HOMESTEAD – CP/TOBACCO  
Surface Embossing: EC-F



HOMESTEAD – CP/STRAW  
Surface Embossing: EC-F



KING PINE – CP/WASHED  
Surface Embossing: EC-T

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



# NATURAL ELEMENTS® 2.0mm LUXURY VINYL PLANK

Finding a floor that looks perfect in your home and stands up to your busy lifestyle is easy with Natural Elements® floors. You'll find beautiful wood looks on a tough resilient surface that can easily handle kids, pets, and heavy traffic.

These floors are not only durable, they're also waterproof! Now you can have the beauty of natural wood anywhere in your home – even in moisture-prone areas like bathrooms and laundry rooms.

Enhanced coatings on Natural Elements® flooring's top layer weathers daily wear and tear effortlessly, whether it's food and drink spills, bath splashes, muddy shoes or paws. These floors also easily resist scratches, stains, and wear, and cleaning couldn't be simpler. Just sweep, dust, or vacuum regularly, and occasionally damp mop to clean the surface.

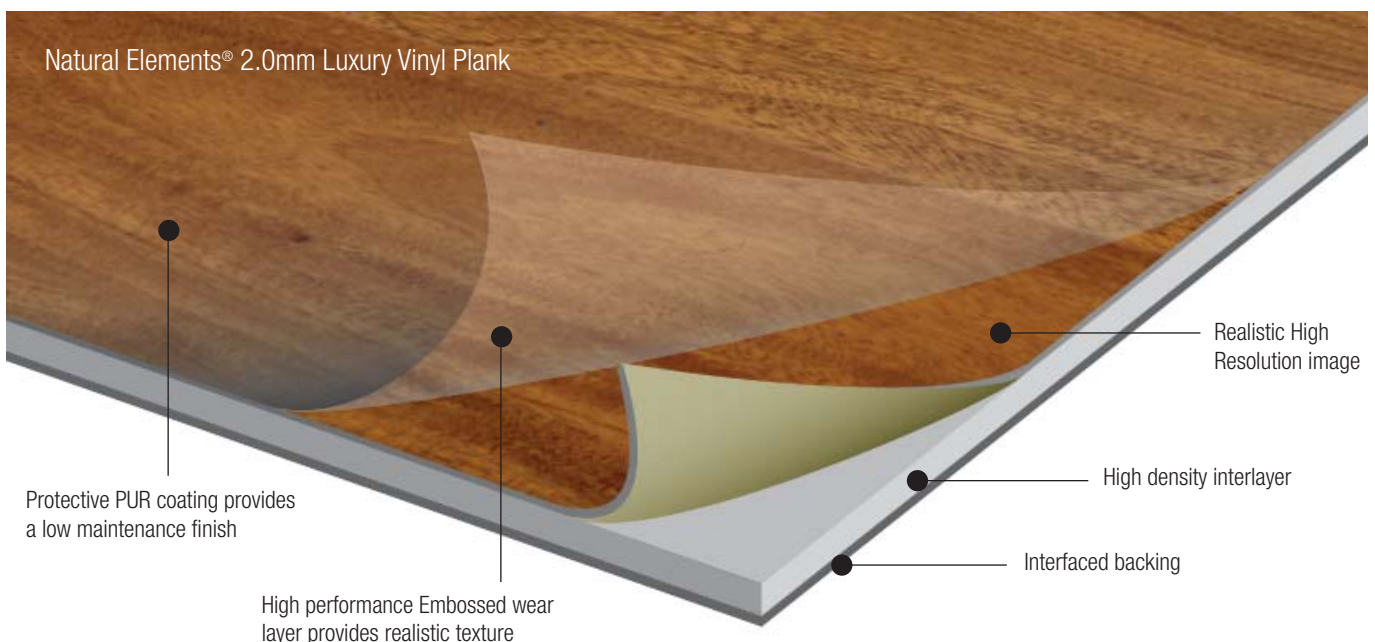


Diagram is indicative for demonstration purposes and is not to scale



# NATURAL ELEMENTS® 2.0mm LUXURY VINYL PLANK

Available in 2.0 x 228 x 1219mm Planks



ANTIQUE OAK – SHADOW  
Surface Embossing: EC-C



ANTIQUE OAK – TUMBLEWEED  
Surface Embossing: EC-C



HOMESTEAD – TOBACCO  
Surface Embossing: EC-F



FOSSIL CREEK – SAND  
Surface Embossing: EC-C



FOSSIL CREEK – EMBER  
Surface Embossing: EC-C



HABITAT – TIMBERWOLF  
Surface Embossing: EC-R

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



# NATURAL ELEMENTS® 2.0mm LUXURY VINYL PLANK

Available in 2.0 x 184 x 1219mm Planks



HARVEST – BUSHLAND  
Surface Embossing: EC-C



HARVEST – PAPERBARK  
Surface Embossing: EC-C



PROVINCIAL BROWN  
Surface Embossing: EC-F



HOMESTEAD – STRAW  
Surface Embossing: EC-F



PROVINCIAL – OLD IVORY  
Surface Embossing: EC-C



BARNSIDE ASHEN  
Surface Embossing: EC-D



BONDI  
Surface Embossing: EC-F



PERUVIAN WALNUT –  
TROPICAL COAST  
Surface Embossing: EC-C

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



# NATURAL ELEMENTS® 2.0mm LUXURY VINYL PLANK

Available in 2.0 x 184 x 1219mm Planks



BARNYARD GREY  
Surface Embossing: EC-F



COLONIAL OAK  
Surface Embossing: EC-C



ROUGHSAWN OAK  
Surface Embossing: EC-C



RUSTIC CHERRY  
Surface Embossing: EC-C



RUSTIC OAK  
Surface Embossing: EC-C



RITE WOOD COAL  
Surface Embossing: EC-M

## NATURAL ELEMENTS® MAINTENANCE

### Maintenance Procedure

- Sweep or vacuum regularly, to remove loose dirt which can scratch your floor.
- Wipe up spills as soon as possible. Never use highly abrasive scrubbing tools on any resilient floor.
- Damp mop your floor regularly with a neutral detergent such as Armstrong Flooring Once 'n Done floor cleaner (or similar pH 7.0-8.5 neutral cleaner).
- Do NOT use highly alkaline 'floor strippers' to clean the floor covering. Highly alkaline solutions have the potential to damage the adhesive bonds between the planks.
- Do NOT use detergents, abrasive cleaners. These products may leave a dull film on your floor.







### Proactive protection of your floor

- Use floor protectors under furniture to reduce indentation. As a general rule of thumb, the heavier the item, the wider the floor protector needed.
- Place a walk-off mat at outside entrances to reduce the amount of dirt brought into your home. We strongly recommend mats without a latex or rubber backing since these backings can cause permanent discoloration.
- All Armstrong Flooring care products have been specifically developed to care for our floors.

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



TECHNICAL DATA		Natural Elements 2.0mm Luxury Vinyl Plank		Natural Elements 5.0mm Cush 'n' Plank		
Type of floor covering	EN ISO 10582	Luxury Vinyl Plank		Luxury Vinyl Plank		
Manufactured		China		China		
Size	ISO 24342	184 x 1219mm	228 x 1219mm	228 x 1219mm	230 x 1500mm	
Squareness and straightness	EN ISO 24342	Deviation allowed at any point for side length				
m²/carton		3.37	4.46	1.67	2.07	
Kg/m²	ISO 23997	3.45	3.45	8.8	8.8	
Overall Thickness	ISO 24346	2.0mm	2.0mm	5.0mm	5.0mm	
Wear Layer	ISO 24346	0.3mm	0.3mm	0.55mm	0.55mm	
Wear Layer Type	ISO 24340	Type I	Type I	Type I	Type I	
Wear Resistance	EN660-2	Group T	Group T	Group T	Group T	
Polyurethane Reinforced		Yes PUR	Yes PUR	Yes PUR	Yes PUR	
Dimensional Stability	ISO 23999	≤ 0.25% (PASS)	≤ 0.25% (PASS)	≤ 0.25% (PASS)	≤ 0.25% (PASS)	
Residual Indentation	ISO 24343-1	≤ 0.1mm (PASS)	≤ 0.1mm (PASS)	≤ 0.1mm (PASS)	≤ 0.1mm (PASS)	
Castor Chair	ISO 4918	PASS	PASS	PASS	PASS	
Acoustic Properties	ISO 717-2			L <sub>nT,w</sub> ≤ 62 NCC:2016 Vol-1 FV5.1(b) (PASS – refer report PN4092 L <sub>nT,w</sub> = 58)		
Fire Resistance	ISO 9239-1					
Critical Radiant Flux		≥ 8kW/m²	≥ 8kW/m²	≥ 8kW/m²	≥ 8kW/m²	
Smoke Development Rate		< 750%	< 750%	< 750%	< 750%	
≤ 400mm		≤ 0.25mm PASS	≤ 0.25mm PASS	≤ 0.25mm PASS	≤ 0.25mm PASS	
≥ 400mm		≤ 0.35mm PASS	≤ 0.35mm PASS	≤ 0.35mm PASS	≤ 0.35mm PASS	
Classification (Use Area)	EN ISO 10874	Domestic Heavy: 23		Commercial: 33		
		Commercial Moderate: 31		Industrial: 42		
Slip Resistance		AS 4586: 2013 (2004)				
Surface Embossing	EC-C	EC-D	EC-F	EC-M	EC-R	EC-T
Wet Pendulum	P3(X)	P3(X)	P2(Y)	P2(Y)	P2(Y)	P2(Y)
Oil – Wet	R10	R10	R10	R9	R10	R9

**NOTE:** Surface Embossing – each different surface emboss/texture is tested separately for slip resistance characteristics, refer to third party certificates for details.

Available from:



**Floorcoverings**

QLD: 07 3347 7300      TAS: 03 6242 8800  
NSW: 02 9616 1500      SA: 08 8178 5300  
VIC: 03 9351 7400      NT: 08 7922 9700

Email: customerservice@mjsfc.com.au