



## MX67G | Grooved 3mm Aluminium Expansion Joint Set

MX67G is specified for use where 3mm vinyl composite tiles or sheetgoods have been installed up to slab expansion joints where lateral movement may occur.



MX67G is fast to install, these aluminium expansion joints provide an economical alternative to the MX63 Solid Brass Expansion Joint Set.

MX63 is designed to be fitted in combination with 3mm commercial vinyl composite tiles or sheetgoods.

It is assumed that sub-floors have been prepared according to the relevant Australian/New Zealand Standards (ie. AS/NZ 1884 – 2012).

### Product Specifications

Product Code:.....MX67G  
Aluminium:.....6063/T6 Hardness  
Overall Length:.....3.66m  
Horizontal Width:.....110mm  
Vertical Height:.....4mm  
Finish:.....Matte Natural Anodised  
Processing:.....Drilled and Countersunk  
(Screws Supplied)  
Pieces Per Carton:.....10 Lengths

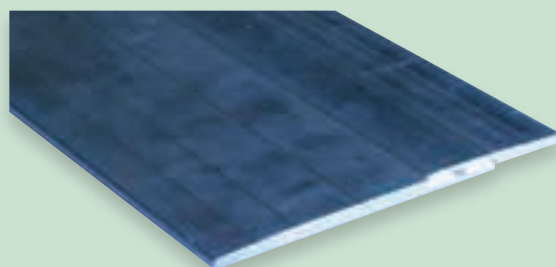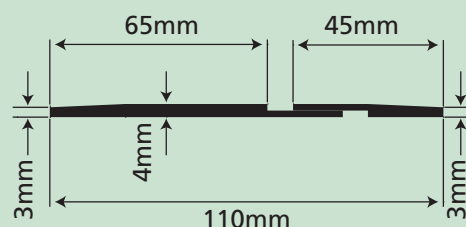

### Installation Instructions

1. Recommended installed width ranges from 113mm to 121mm.
2. Install wider base section first. It is recommended that it be installed so that the tile/sheet edge is 45mm to 50mm from the edge of the concrete control joint, which ensures the slab gap is covered by the 4mm aluminium thickness.
3. Firmly retain the aluminium expansion joint against the installed tiles or sheet, to ensure no gapping. Using the base as a template, drill an 8mm hole into the slab to a depth of not greater than 35mm, and secure using the supplied plugs and countersunk stainless steel screw. Repeat this process down the length of the joint.
4. The narrower section of the two-part expansion joint is then fitted to the opposite side of the slab joint, using the same methodology as per step number three.
5. The resultant gap between the two parts of the expansion joint should range between 4mm to 8mm.
6. A bead of mastic adhesive or silicone can be applied beneath the expansion joint to ensure that sub-floor irregularities are isolated.

© 2013 ACN 100 338 896. All Rights Reserved.

August 2015

**NOTE:** While MJS Floorcoverings make every effort to ensure the accuracy of the information shown herein, it is the user's responsibility to satisfy themselves of the suitability of the product for their specific application.

### MJS STOCKISTS

**QLD**  
Brisbane  
MJS Floorcoverings  
Telephone: (07) 3347 7300  
Facsimile: (07) 3343 9792

**NSW**  
Sydney  
MJS Floorcoverings  
Telephone: (02) 9725 5519  
Facsimile: (02) 9725 5552

**VIC**  
Melbourne  
MJS Floorcoverings  
Telephone: (03) 9314 2872  
Facsimile: (03) 9314 6971

**ACT**  
Canberra  
MJS Floorcoverings  
Telephone: (02) 6239 1000  
Facsimile: (02) 6228 1430

**TAS**  
Hobart  
MJS Floorcoverings  
Telephone: (03) 6228 1032  
Facsimile: (03) 6228 1035

**SA**  
Adelaide  
MJS Floorcoverings  
Telephone: (08) 8340 2266  
Facsimile: (08) 8340 2188

**NT**  
Darwin  
MJS Floorcoverings  
Telephone: (08) 8947 6917  
Facsimile: (08) 8947 1528

**WA**  
Perth  
MANAG Floorcoverings & Acc.  
Telephone: (08) 6240 1000  
Facsimile: (08) 9445 1332